

# QUOTATION DATA SHEET

Note: To mark the choice, pls click twice in each square.

**CUSTOMER: (YOUR COMPANY NAME):**  
**YOUR NAME:**  
**REQUESTED DELIVERY DATE:**

**YOUR REFERENCE/ JOB NO.:**  
**OUR REFERENCE:**  
**DATE:**

**LIFT DIRECTIVES/ STANDARDS:**

- 95/16/ CE     EN-8172     EN-8128     Other .  
 EN-8170     EN-8173     No directive

- NUMBER OF LIFTS :**      **TYPE :**     Traction     Hydraulic     Hydraulic MRL (with cabinet)  
 Traction Machine Roomless Lift:  
 \*  SILENS PRO, Gearless with synchronous motor VVVF  
 \*  VPM, with Gear box motor 2 speeds

EXISTING BUILDING     NEW BUILDING

**MACHINE ROOM:**     At the top     At the bottom     Adjacent     Machine room less (SILENS PRO, VPM )


**SPEED:**     1/0,25 m/s (2 speed)     0,63/0,15 m/s     1 m/s VVVF     1,6 m/s VVVF     Other

**POWER SUPPLY:**     230 V     400     415 V /     50 Hz     60 Hz

**CAPACITY:**     300 Kg / 4 Persons     450 Kg / 6 Persons     600 Kg / 8 Persons     630 Kg / 8 Persons (Disabled people use)  
 750 Kg / 10 Persons     1000 Kg / 13 Persons     1250 Kg / 16 Persons     1350 Kg / 18 Persons  
 1500 Kg / 20 Persons     1600 Kg / 21 Persons     2000 Kg / 26 Persons     2500 Kg / 33     Other

**NUMBER OF STOPS**      **CAR ACCESSES (number):**      **DOUBLE ENTRANCE**     AT 90°     AT 180°

**NUMBER OF LANDING ENTRANCES:**

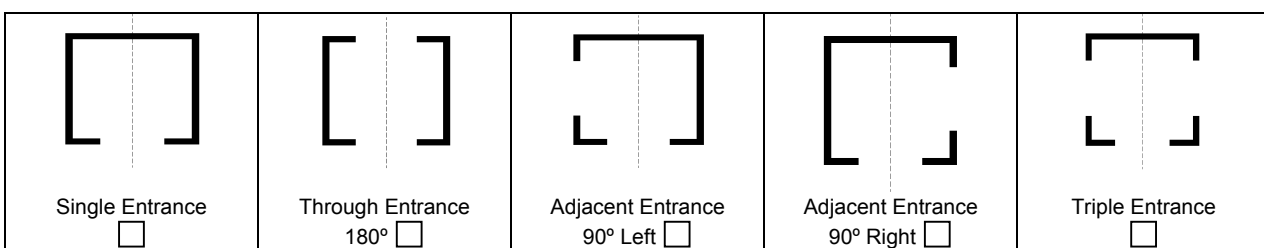

**SHAFT DIMENSIONS :**      WIDTH ( mm ) =      DEPTH ( mm ) =  
 TOTAL TRAVEL ( mm ) = .  
 FLOOR TO FLOOR DIMENSION ( mm ) :.  
 HEADROOM ( mm ) **Under lifting beam** =  
 PIT (mm) =

**CAR FINISH:**

- AMALTEA (Skinplate)     MITRA (St. steel)     VESTA (LUXURY not EN8170)     PANORAMIC  
 TEMIS (Formica)     TEMIS in st. steel     ASTREA (LUXURY not EN8170)

Car protections:      Wall finish:      Ceiling type:      Floor type:      Comments:  
 MIRROR     1/3     Half     Full wall

**PUSH BUTTONS**     Standard    DMG Tactile relieve EN8170     Dewhurst US91 UK (round) EN8170     Dewhurst US90 UK (square) EN8170  
 Dewhurst US91 Australia     Schäffer     Other

**DOORS**     Automatic     Bus type (folding)     //     Side opening     Central opening

**DOOR MANUFACTURER/ MODEL**     SELCOM     Other    //     Mod. Augusta     Mod. Hydra     Other

**DOOR OPERATOR**     ECO     MIDI     SUPRA    (GLE will choose the most appropriate one if not mentioned)

**DIMENSIONS**     700 X 2000 mm     800 x 2000 mm     900 x 2000 mm     Other:     Other door height :

**DOOR PANNELS**     2     3     4     6

**DOOR FINISH**     Epoxy     Brushed stainless steel     Patterned stainless steel (elephant skin)     Other:

**OPTIONS:**

Photocell (Standard)  Electronic safety edge 2D  Electronic safety edge 3D  Other

---

**LANDING DOORS:**

TYPE  Semiautomatic  Automatic //  Side opening  Central opening  
 DIMENSIONS  700 X 2000 mm  800 x 2000 mm  900 x 2000 mm  Other:  Other door height:  
 DOOR PANELS  2  3  4  6  
 DOOR FINISH  Epoxy  Brushed stainless steel  Patterned stainless steel (elephant skin)  Other:  
 DOOR MANUFACTURER/ MODEL  SELCOM  Other //  Mod. Augusta  Mod. Hydra  Other  
 FIRE RESISTANCE  Not required  E-120 (EN81-58)  E-120 (WARRINTON)  Other:

---

**CONTROL PANNEL :**

Automatic Push Button (A.P.B)  Down collective  Full collective  
 Simplex  Duplex  Triplex  Cuadrupelex  
 Evacuation control  Firemen  Car attendant/ Car preference  Door hold  
 Gong  Buzzer  Automatic Rescue Device (with UPS)  Emergency Valve  
 Max. load by-pass  Door close  Light switch  Car fan switch

**CONTROL PANEL BOX EN81-A2 compliant** FINISH:  Epoxy  Brushed st. steel

---

**INDICATORS:**

CAR  Intercom  Standard Rotating indicator (dot matrix)  LCD blue  
 Visible and Audible overload detector (included in 95/16/ CE)  Voice Synthetiser  Keyswitches – N° of stops  
 Please, indicate the operation: firemen/car preference/door hold/light/ car fan:  Other:  
 AT MAIN FLOOR:  Intercom  Direction  Standard position (7 segments)  Rotative position  LCD blue  
 Keyswitch – N° of stops Please, indicate the operation: firemen/car preference/door hold/light/ car fan:  
 AT OTHER FLOORS:  Direction  position (7 segments)  Rotative position  LCD  
 Keyswitch – N° of stops Please, indicate the operation: firemen/car preference/door hold/light/ car fan:

---

**GUIDES:**

LENGTH:  Standard 5 m  2.5 m // POSITION:  On the right  On the left

---

**FLOOR NAMES:**

Main floor:  
 Top floor:  
 Bottom floor:  
 Firemen's floor

---

**COMMENTS:**

Please send to: [a.lopez@gle.com.es](mailto:a.lopez@gle.com.es)

---

**Our prices will be based upon the data you supplied to us. If during the technical study of the offer, should be necessary the modification of any of the above mentioned specifications, GLOBAL LIFT EQUIPMENT, reserves its right to modify the previously quoted price.**