




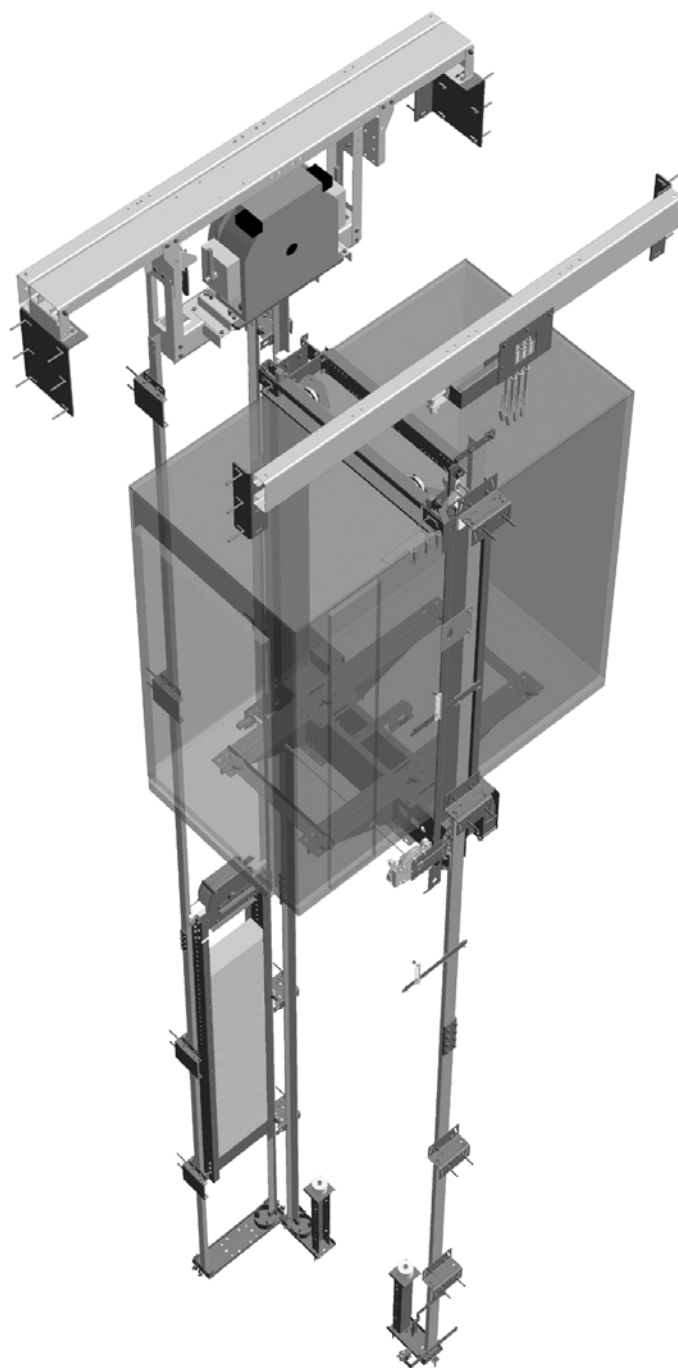
Enviro Trend 1

***Ideal for offices, hospitals
and public buildings***

- MRL lift.
- Ranging a rated load capacity from 750 to 1000 kg at rated speed of 1 m/s.
- Our gearless motor is light, compact, energy-efficient and eco-friendly.
- Easy to install and maintain. Special installation tools available on request.
- Equipped with Direct Approach System as standard.
- EN81-20 compliant.

Enviro Trend 1

Building type	  
Load	750-1000 kg
Speed	1 m/s
Min. Pit	1050 mm
Min. Headroom	3400 mm
Roping	2 : 1
Openings	0° - 180°
Machine	MINI 3-10-800 MINI 4-10-1000
Sling type	Conventional pulleys below
Guide Rails	Car T82/A Counterweight T50/A
Car Frame	(P+Q) Max 2350 kg
Ropes	Diameter= 8 mm 8x19-S+(5x7+1)





Rated Load (kg)	Nº of people	Speed (m/s)	Entrances Nº/Angle	Car Size		Shaft Size		Pit	Headroom	Doors**	Machine Power/Current
				Width	Depth	Width	Depth*				
750	10	1	1/0°	1100	1600	1600	1875	1050	3400	2PSO 900	MINI 3-10-800 5,5kW / IN= 13,2A IS= 19,8A
			2/180°			1600	2000				
			1/0°			1950	1850				
			2/180°			1950	1975				
			1/0°	1300	1400	1800	1675				
			2/180°			1800	1800				
			1/0°			1950	1675				
			2/180°			1950	1775				
1000	13	1	1/0°	1100	2100	1600	2375	1050	3400	2PSO 900	MINI 4-10-1000 6,8kW / IN= 16,8A IS= 25,2A
			2/180°			1600	2500				
			1/0°			1950	2375				
			2/180°			1950	2475				
			1/0°	1600	1400	2100	1675				
			2/180°			2100	1800				
			1/0°			2100	1700				
			2/180°			2125	1775				
			1/0°	1400	1600	1900	1875				
			2/180°			1900	1990				
			1/0°			2000	1900				
			2/180°			2125	1990				

*Shaft depth dimensions consider landing doors 25mm inside the shaft

**Calculations made for SELCOM WITTUR HYDRA doors.

Counterweight safetygear not available for this model.

Unless stated otherwise, all dimensions are expressed in millimetres.

Operational ranges

Shaft	Pit:	Standard minimum: 1050 mm Reduced minimum: 900mm (EN81-21)
	Headroom:	Standard minimum (2200 mm high car): 3400 mm Reduced minimum (2050 mm high car): 3250 mm
	Minimum width:	Car width + 500 mm

Car	Minimum width:	1000 mm
	Maximum width:	1650 mm
	Minimum depth:	1400 mm
	Maximum depth:	2100 mm
	Standard Height:	2200 mm



Click here for more information about this product
www.gle-lifts.com